


# Sound Transducers (Magnetic Buzzer)

## HCM12-X

SERIES

FEATURES

Sealed with built-in oscillating circuit for wave soldering and washing

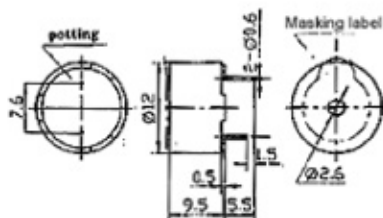

### SPECIFICATIONS

Type	HCM1201X	HCM1206X	HCM1212X
Rated Voltage (V)	1.5	6	12
Operating Voltage (V)	1.3-2	4-7	8-15
△Rated Current (mA)	≤20		≤30
△Sound Output at 10cm (dB)	≥75		≥85
△Resonant Frequency (Hz)	2300±400		2300±300
▲Response Time (ms)		≤50	
Operating Temperature (°C)	-10 ~ +50		-25 ~ +80
Storage Temperature (°C)	-15 ~ +60		-30 ~ +80
Weight (g)		2	

△Value applying rated voltage (DC)

▲Value applying (Min. operational DC voltage)

