




OUTPUT:0.05W-0.8W (APPROX) WEIGHT: 4g (APPROX)

*By clicking the "MODEL", you can display the Performance Chart Simulation.


MODEL	VOLTAGE		NO LOAD			AT MAXIMUM EFFICIENCY				STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	TORQUE	CURRENT	
		V	r/min	A	r/min	A	mN·m g·cm	W	mN·m g·cm	A	
FF-M20VA 1255	1.2 - 2.0	1.5	17100	0.094	13300	0.33	0.15 1.6	0.21	0.69 7.0	1.15	
FF-M20VK 10120	1.5 - 4.0	2.8	17800	0.052	14050	0.19	0.18 1.8	0.26	0.85 8.7	0.73	

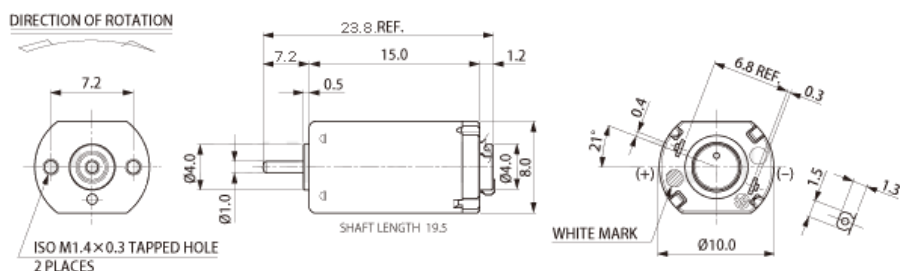

取付けネジの長さはモータース面より1.2以下
 Usable machine screw length 1.2 max. from motor mounting surface.
 安装螺丝的长度须从马达壳面算起1.2以内

UNIT: MILLIMETERS

FF-M20VA-1255 1.5V

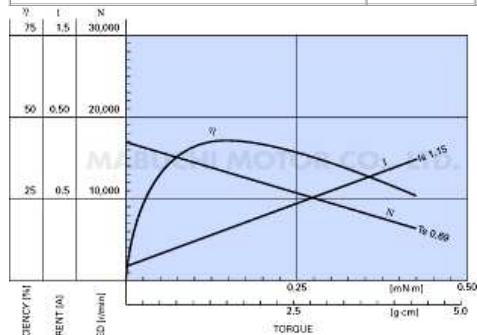

FF-M20VK-10120 2.8V

